

Linea7 3002 Slip

BRICK SLIPS
CATEGORY I, U



TEXTURE, TYPE & COLOUR

The decorative brickwork (inside and/or outside face) is made with a solid unsanded moulded brick without grain with an even structure. The color is carmine

TECHNICAL CHARACTERISTICS

The bricks are delivered with the following characteristics, in accordance with the CE and UKCA mark:

CE mark according to EN 771-1: 2011 + A1: 2015 and UKCA mark according to BS EN 771-1 : 2011 + A1 : 2015

Manufacturing dimensions (L x W x H)	: *235x20x36 mm
Quantity / m ² with a traditional joint	: ca. 84
Number / m ² with a thin joint	: ca. 99
Size tolerance	: T1
Size spread	: Rm (12/6/4)
Gross mass density	: 1900 Kg/m ³ (+/- 20%)
Avg. standardised compressive strength (cat I)	: > 30 N/mm ²
Water absorption (24 hours)	: < 8%
Initial water absorption (1 minute)	: 0,5 =< IW2 =< 1,5 (IW2)
Water vapour permeability	: μ = 5/10
Thermal properties (λ10, dry, 90/90)	: 0.85 W/mK (table 1 EN1745)
Durability (frost / thaw / resistance)	: F2 – highly frost-resistant
Active soluble salts	: class S2
Fire reaction	: class A1
Bond strength (according to EN998-2: 2003 Annex C)	: NPd (no performance determined)




VANDE MOORTELT
CLAY PAVERS • FACING BRICKS • SLIPs

ORIGIN : VANDE MOORTELT NV | Scheldekant 5 | BE-9700 OUDENAARDE |
T +32 (0)55 33 55 66 | BTW BE 0432.038.790 | - info@vandemoortel.co.uk

Linea7 3002 Slip

Productshot

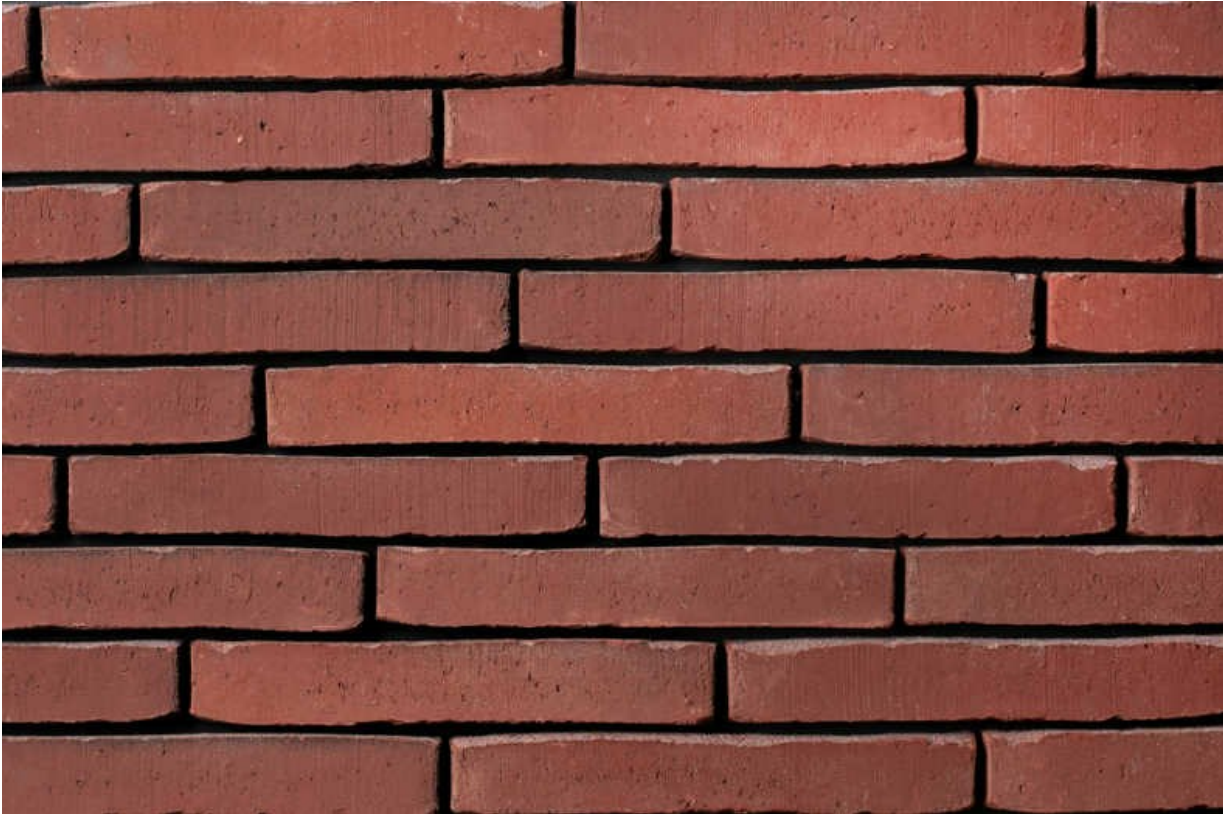

VANDE MOORTELE
CLAY PAVERS • FACING BRICKS • SLIPS

ORIGIN : VANDE MOORTELE NV | Scheldekant 5 | BE-9700 OUDENAARDE |
T +32 (0)55 33 55 66 | BTW BE 0432.038.790 | - info@vandemoortel.co.uk